



QuietSound™
Acoustical Underlayment



**Revised
January 2013**

How QuietSound Acoustical Underlayment Can Contribute To Obtaining LEED® Credits





Table of Contents

3	What is LEED? Overview
5	How QuietSound Can Apply to LEED
7	LEED-NC: Materials and Resources Construction Waste Management
8	LEED-NC: Materials and Resources Recycled Content
10	LEED-NC: Materials and Resources Local/Regional Materials
11	LEED-NC: Indoor Environmental Quality Low-Emitting Materials
13	LEED 2009 Credit Alignment The Differences/Similarities of LEED rating systems
15	About QuietSound and U.S. RUBBER



What is LEED? Overview

Recycled rubber underlayment is a growing category for sound insulation within the construction industry and continues to increase in popularity as a practical solution for construction applications. The easy installation, durability, and quality of QuietSound Acoustical Underlayment is ideal for a wide variety of sound control applications, and as a green alternative to easily compressible carpet padding and engineered and hardwood padding.

The demand for recycled sound insulation products is increasing due to its many positive environmental attributes. The high recycled content and low-VOC emissions and life cycle costs make it an environmentally sensitive choice for a variety of applications. These benefits also enable it to potentially contribute points towards LEED certification. QuietSound Acoustical Underlayment is designed to meet the stringent criteria required to help earn points in 2 of the 6 categories of LEED. Based on these criteria, US Rubber products can assist specifiers by potentially contributing towards up to 7 LEED-NC/CI and 9 LEED-EB points.

What is LEED?

The Leadership in Energy and Environmental Design (LEED) Green Building Rating System represents the U.S. Green Building Council's effort to provide a national standard for what constitutes a "green" building. It is utilized as a design guideline and certification tool for architects and designers seeking to develop high-performance, sustainable buildings.

There are currently 5 versions of LEED available:

- LEED for New Construction and Major Renovations (LEED-NC) is designed to guide and distinguish high-performance commercial and institutional projects.
- LEED for Existing Buildings: Operations & Maintenance (LEED-EB) provides a benchmark for building owners and operators to measure operations, improvements, and maintenance.
- LEED for Commercial Interiors (LEED-CI) is a benchmark

for the tenant improvement market that gives the power to make sustainable choices to tenants and designers.

- LEED for Core & Shell aids designers, builders, developers, and new building owners in implementing sustainable design for new core and shell construction.
- LEED for Schools recognizes the unique nature of the design and construction of K-12 schools. Based on the LEED for New Construction rating system, it addresses issues such as classroom acoustics, master planning, mold prevention, and environmental site assessment.



QuietSound™


Acoustical Underlayment



The LEED rating system defines the requirements, by category (listed above), needed to achieve points under each area. Projects earn one or more points toward certification by meeting or exceeding each credit's technical requirements. Points compute to a final score that relates to one of four possible levels of certification: LEED Certified, LEED Silver, LEED Gold, or LEED Platinum.

In the past nine years, over 1,800 projects have attained LEED certification and over 14,500 projects are registered and undergoing the LEED certification process. By 2010, approximately 10% of commercial construction starts were green. The green building products market is worth \$30-\$40 billion annually. Every business day, \$464 million worth of construction registers with LEED, clearly illustrating the increasing popularity of environmentally sustainable building practices.

This document outlines the specific LEED credit areas impacted by flooring materials and systems, with a comparison of the key similarities and differences of all current rating systems.

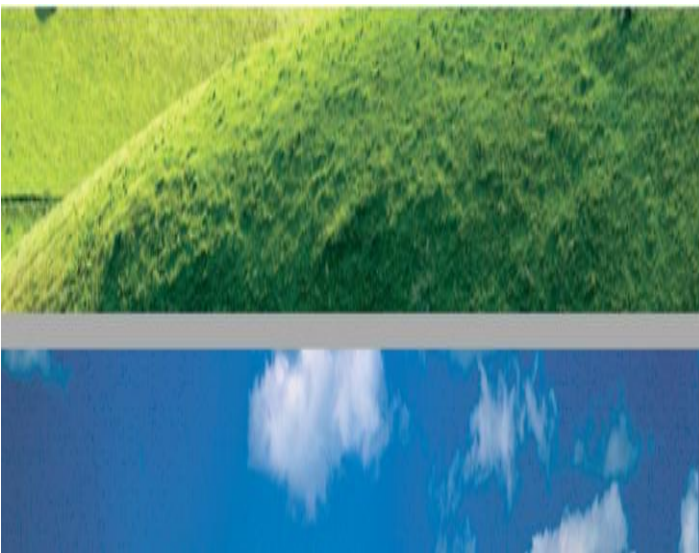

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com





QuietSound™

Acoustical Underlayment



How QuietSound Can Apply to LEED

The Benefits of LEED

Why is obtaining LEED certification beneficial? In addition to the obvious environmental benefits, certification proves to the market that a building is efficient and incorporates responsible building practices. LEED certification showcases environmental commitment and leadership to both your community and employees. As a result, positive publicity and exposure could be generated.

Green buildings have also been proven to be more economically efficient as a result of the following factors:

- Increased health and safety benefits of employees or students
- Increased employee productivity, and lower turnover and absenteeism
- Increased sales in retail establishments

- Reduced operating costs
- Increased building evaluation and return on investment

How QuietSound can apply to LEED

Many products have the potential to contribute points to LEED, but since credits are based on the performance of all the products involved in a particular project, there is not one stand-alone product that can guarantee you will obtain LEED credits. It is the combination and the weight of each that is critical.

QuietSound Acoustical Underlayment is designed to meet the stringent criteria required to help earn points under 2 of the 6 categories of LEED. Based on these criteria, QUIETSOUND products can assist specifiers by potentially contributing toward earning up to 7 LEED points in new construction and commercial interiors, and 9 LEED points in existing buildings.

NC

LEED for New Construction and Major Renovations is designed to guide and distinguish high performance commercial and institutional projects.

CI

LEED for Commercial Interiors is a benchmark for the tenant improvement market that gives the power to make sustainable choices to tenants and designers.

EB

LEED for Existing Buildings: Operations & Maintenance provides a benchmark for building owners and operators to measure operations, improvements, and maintenance.

Schools

LEED for Schools recognizes the unique nature of the design and construction of K-12 schools. Based on the LEED for New Construction rating system, it addresses issues such as classroom acoustics, master planning, mold prevention, and environmental site assessment.

LEED Credit areas Impacted by Flooring – NC 2.2 and CI 2.0

*Note: LEED standards change and should be checked for recent updates.

Category	Credit Title	Credit Number	Points Attainable
Materials & Resources	Construction Waste Management – 50-75%	MR 2.1-2.2	1-2
	Recycled Content – 10-20%	MR 4.1-4.2	1-2
	Local/Regional Materials – 50-75%	MR 5.1-5.2	1-2
Indoor Environmental Quality	Low-Emitting Materials - Adhesive	EQ 4.1	1

LEED Credit areas Impacted by Flooring – Existing Buildings 2.0

*Note: The following chart is from LEED EB 2.0. This will be updated accordingly for LEED 2012.

MANUFACTURED BY:



www.usrubber.com 888-473-8453 info@usrubber.com





QuietSound™

Acoustical Underlayment



LEED Credit areas Impacted by Flooring – Schools 2009

*Note: Always check for LEED updates, for informational purposes only.

Category	Credit Title	Credit Number	Points Attainable
Materials & Resources	Construction Waste Management – 50-75%	MR 2	1-2
	Recycled Content	MR 4	1-2
	Low-Emitting Materials – Adhesives and Sealants	IEQ 4.1	1
	Enhanced Acoustical Performance	IEQ	1

Materials & Resources	Construction, Demolition and Renovation Waste Management – 50-75%	MR 1.1-1.2	1-2
	Optimized Use of Alternative Materials - 10-50%	MR 2.1-2.2	5
	Optimized Use of IAQ Compliant Products – 45-90%	MR 3.1-3.2	1-2

MANUFACTURED BY:



www.usrubber.com 888-473-8453 info@usrubber.com





QuietSound™

Acoustical Underlayment



LEED-NC: Materials and Resources

Construction Waste
Management

Definition of LEED-NC Credits MR 2.1 & MR 2.2:

MR 2.1 ... (1 point)

- Recycle and/or salvage at least 50% of non-hazardous construction and demolition debris. Develop and implement a construction waste management plan that, at a minimum, identifies the materials to be diverted from disposal and whether the materials will be sorted on-site or commingled. Calculations can be done by weight or volume, but must be consistent throughout.

MR 2.2 ... (1 point in addition to MR 2.1)

- Recycle and salvage an additional 25% beyond MR 2.1 (75% total) of non-hazardous construction and demolition debris.

Definition of LEED-EB Credits MR 1.1 & MR1.2:

MR 1.1 ... (1 point)

- Divert at least 50% of construction, demolition, and land-clearing waste from landfill and incineration disposal.

MR 1.2 ... (1 point in addition to MR 2.1)

- Divert at least 75% of construction, demolition, and land-clearing waste from landfill and incineration disposal.

How QuietSound can contribute:

- All QuietSound salvages and overages can be packaged and shipped back at the owner's expense to U.S. RUBBER's Re grind program in Colton, CA.

Customers must first submit an application to have their material accepted into the program. Both product scrap and old materials must be free of excessive adhesive and foreign contaminants, including stones, wood, concrete, asphalt, etc. Materials accepted into the Re grind program will be sorted, shredded, cleaned and ground for the next generation of recycled rubber flooring, underlayment and industrial products.

For more information on U.S. RUBBER's Re grind program, including application and requirements, please email regrind@usrubber.com or visit our website at www.usrubber.com.

Potential Strategies:

Establish goals of diversion from disposal in landfills, incineration facilities, and adopt a construction waste management plan to achieve these goals.

Consider recycling cardboard, metal, brick, rubber, mineral fiber panel, concrete, plastic, clean wood, glass, gypsum wallboard, carpet, and insulation. Designate a specific area on the construction site for segregated or commingled collection of recyclable materials, and track recycling efforts through the construction process.

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com





QuietSound[™]
Acoustical Underlayment



**LEED-NC:
Materials and
Resources**
Recycled Content

**Definition of LEED-NC Credits
MR 4.1 & MR 4.2:**

MR 4.1 ... (1 point)

- Use materials with recycled content such that the sum of post-consumer recycled content plus one half (the value of) the pre-consumer content constitutes at least 10% of the total value of the materials in the project.
- The value of the recycled content portion of a material or furnishing shall be determined by dividing the weight of recycled content in the item by the total weight of all material in the item, then multiplying the resulting percentage by the total value of the item.

MR 4.2 ... (1 point in addition to MR 4.1)

- Use materials with recycled content such that the sum of post-consumer recycled content plus one half (the value of) the pre-consumer content constitutes at least 20% of the total value of the materials in the project.

**Definition of LEED-EB
Credits MR 2.1 - MR 2.5:**

Maintain a sustainable purchasing program covering at least office paper, office equipment, furniture, furnishings, and building materials for use in the building and on the site. A template calculator will be provided for LEED for Existing Buildings MR Credit 2.1–2.5. One point (up to a maximum of five) will be awarded for each 10% of total purchases over the performance period (on a dollar basis) that achieves at least one of the following sustainability criteria:

- Contains at least 70% salvaged material from off site or outside the organization.
- Contains at least 70% salvaged from on site through an internal organization materials & equipment reuse program.
- Contains at least 10% post-consumer or 20% post-industrial material.
- Contains at least 50% rapidly renewable materials.
- Is Forest Stewardship Council (FSC) certified wood.
- Contains at least 50% materials harvested and processed or extracted and processed within 500 miles of the project.

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com





QuietSound™
Acoustical Underlayment



Note: In calculating the percentage of purchases over the performance period conforming to the requirements, each purchase can only receive credit against a single requirement (i.e., a purchase that contains both 10% post-consumer recycled content and is harvested within 500 miles of the project counts only once in this calculation).

QuietSound Recycled Content

How QuietSound can contribute:

QuietSound is comprised of shredded and cleaned SBR tire rubber (post-consumer waste) and EPDM flecks. The result is a polymerically bound insulation with very high-recycled content.

Recycled content is defined in accordance with the International Organization for Standardization® document, ISO 14021 – Environmental labels and declarations:

- Post-consumer material – waste materials diverted from the waste stream after consumer or commercial use.
- Pre-consumer material – materials diverted from the waste stream during the manufacturing process. Excluded is regrind, rework, or scrap.

Potential Strategies:

Establish a project goal for recycled content materials and identify material suppliers that can achieve this goal. During construction, ensure that the specified recycled content materials are installed and quantify the total percentage of recycled content materials installed.

QuietSound	5mm	93%
	10mm	93%

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com





QuietSoundTM
Acoustical Underlayment



LEED-NC:
Materials and
Resources
Local/Regional Materials

Definition of LEED-NC Credits MR 5.1 & MR 5.2:

MR 5.1 ... (1 point)

- Use building materials or products that have been extracted, harvested or recovered, as well as manufactured, within 500 miles of the project site for a minimum of 10% (based on cost) of the total material Value

If only a fraction of a product or material is extracted/harvested/recovered and manufactured locally, then only that percentage (by weight) shall contribute to the regional value.

Shaded area within circle is a 500 mile radius

MR 5.2 ... (1 point in addition to MR 5.1)

- Same as above but with a minimum of 20% of the total material value.

To determine if your project qualifies for this credit, please call 1-909-825-1200 for a complete listing of areas within a 500 mile radius.



**QuietSound Acoustical Underlayment
Manufactured in America**

U.S. RUBBER Manufacturing Plant (Colton, CA 92324)

MANUFACTURED BY:




www.usrubber.com 888-473-8453 info@usrubber.com



LEED-NC: Indoor Environmental Quality

Low-Emitting
Materials: Adhesives &
Sealants



One point shall be awarded, up to a maximum of 2 points, for each 45% of annual purchases calculated on a cost basis that conform to one of the following sustainability criteria:

- a. Adhesives and sealants with a VOC content less than the current VOC content limits of South Coast Air Quality Management District (SCAQMD) Rule #1168, or sealants used as fillers that meet or exceed the requirements of the Bay Area Air Quality Management District Regulation 8, Rule 51.
- b. Paints and coatings with VOC emissions that do not exceed the VOC and chemical component limits of Green Seal's Standard GS-11 requirements.
- c. Carpet that meets the requirements of the CRI Green Label Plus Carpet Testing Program.
- d. Carpet cushion that meets the requirements of the CRI Green Label Testing Program.
- e. Composite panels and agrifiber products that contain no added urea-formaldehyde resins.

How QUIETSOUND can contribute:

QuietSound Acoustical Underlayment is manufactured in Colton, CA. All product scrap and waste is collected and reincorporated into finish products.

Potential Strategies:

Establish a project goal for locally sourced materials and identify materials and material suppliers that can achieve this goal. During construction, ensure that the specified local materials are installed and quantify the total percentage of local materials installed.

Definition of LEED-NC Credit EQ 4.1:

EQ 4.1... (1 point)

- Adhesives and sealants must be lower than the current VOC content limits of South Coast Air Quality Management District (SCAQMD) Rule #1168.

Definition of LEED-EB Credits EQ 3.1 - EQ 3.2:

Optimize use of air quality compliant materials inside the building to reduce the emissions from materials used in the building. Points are awarded for the existence of product purchasing policies for the building and site addressing the requirements of this credit and documentation of purchasing during the performance period in conformance with those policies, as described below. Subsequent re-certification is tied to both polices and purchasing performance, as described below. At a minimum, these policies must include the following product groups: paint and coatings, adhesives, sealants, carpet, composite panels, and agrifiber products. The building materials covered include any building materials covered by letters a.-e. listed below that are used for improvements, including upgrades, retrofits, renovations, or modifications.

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com





QuietSound[™]
Acoustical Underlayment



LEED-NC

Indoor Environmental Quality

**How US Rubber’s SurvivorGrip can contribute:
Potential Strategies:**



SurvivorGrip, a revolutionary zero-VOC adhesive (SCAQMD) Rule #1168. The low odor, one-component urethane adhesive is formulated for use with indoor and outdoor applications. Easy to trowel and apply, its moisture-cured, no-mix formula provides excellent adhesion to elastomers, concrete, and wood. The product is solvent free, anti-microbial, and has a 12 month shelf life.

Specify low-VOC materials in construction documents. Ensure that VOC limits are clearly stated in each section where adhesives and sealants are used. Review product cut sheets, MSDS sheets, signed attestations, or other official literature from the manufacturer clearly identifying the VOC contents or compliance with referenced standards.

The zero-VOC content of SurvivorGrip is far less than that which is required by the California South Coast Air Quality Management District (SCAQMD) Rule #1168 for adhesive flooring and sealant applications, the most demanding standard in the U.S.

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com





QuietSound[™]
Acoustical Underlayment



The Key Differences and Similarities of LEED Rating Systems

LEED 2009 is a new version of the rating system that delivers against key environmental and human health impacts, and puts in place a transparent framework for weighting credits accordingly, based on the best available science. LEED 2009 consists of credit alignment and harmonization; transparent environmental and human impact credit weighting; regionalization; and a predictable development cycle. The organizational structure now being used to manage LEED makes many of the credits congruent across all rating systems. The following chart outlines the similarities and differences between the various LEED rating systems.

LEED - New Construction 2009 (NC)		LEED - Commercial Interiors 2009 (CI)	LEED - Existing Buildings 2009 (EB)
General			
Applies to whole buildings	Applies to tenant improvements of new or existing office space	Applies to facility management policies and measured performance	
Materials and Resources			
MR Credit 2: Construction Waste Management - 1-2 pts. 1 point - 50% of construction debris diverted from landfills 1 additional point - 75% of construction debris diverted from landfills	MR Credit 2: Construction Waste Management - 1-2 pts. Same requirements as LEED-NC Credit MR 2	MR Credit 3: Sustainable Purchasing - Facility Alterations and Additions - 1 pt 50% of total purchases achieving at least one of the criteria on the sustainability list during the performance period Points may be earned through at least one of the following criteria: - Purchases contain at least 10% post consumer and/ or 20% postindustrial material - Adhesives meet VOC content limits of South Coast Air Quality Management District	
MR Credit 4: Recycled Content - 1-2 pts. 1 point - 10% of total project materials, by cost, contain recycled content (post + 1/2 pre-consumer) 1 additional point - 20% of total project materials, by cost, contain recycled content (post + 1/2 pre-consumer)	MR Credit 4: Recycled Content - 1-2 pts. Same requirements as LEED-NC MR Credit 4		
MR Credit 5: Regional Materials - 1-2 pts. 1 point - 10% of building materials or products used are extracted, harvested, recovered, or manufactured within 500 miles of the project site 1 additional point - 20% of building materials or products used are extracted, harvested, recovered, or manufactured within 500 miles of the project site	MR Credit 5: Regional Materials - 1-2 pt. 1 point - Option 1: 20% minimum of construction and Division 12 (Furniture) materials and products used are manufactured within 500 miles of the project site 1 additional point - Or - Option 2: Meet requirements of option 1 and 10% minimum of construction and Division 12 (Furniture) materials used are extracted, harvested, recovered, or manufactured within 500 miles of the project site	MR Credit 9: Solid Waste Management - Facility Alterations and Additions - 1 pt Divert 70% of waste by volume generated by facility alteration and additions from disposal to landfills and incineration facilities	
Indoor Environmental Quality			

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com






QuietSound™

Acoustical Underlayment



<p>IEQ 4.1: Low Emitting Materials: Adhesives and Sealants - 1 pt. Adhesives meet VOC limits for South Coast Air Quality Management District (SCAQMD)</p>	<p>EQ 4.1: Low Emitting Materials: Adhesives and Sealants - 1 pt. Same requirements as LEED-NC IEQ Credit 4.1</p>	
<p>IEQ 4.3: Low Emitting Materials: Flooring Systems - 1 pt. Option 1: All hard surface flooring must meet the requirements of the Floorscore standard Or - Option 2: All interior flooring elements must meet the testing and product requirements of the California Department of Health Services Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers, including 2004 Addenda.</p>	<p>EQ 4.3: Low Emitting Materials: Flooring Systems - 1 pt. Same requirements as LEED-NC IEQ Credit 4.3</p>	

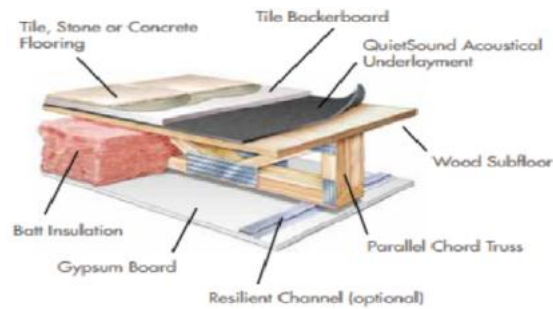

Cross-section of installation under tile, stone or concrete

MANUFACTURED BY:



www.usrubber.com ■ 888-473-8453 ■ info@usrubber.com





QuietSound[™]
Acoustical Underlayment



ABOUT U.S.RUBBER AND QUIETSOUND ACOUSTICAL UNDERLAYMENT

QuietSound Acoustical Underlayment is a line of high quality sound control underlayment manufactured in the U.S.A. by U.S. RUBBER Recycling, Inc., a leading innovator in recycled products technology. QuietSound is made from 93% recycled rubber and has been tested in different laboratory and field test assemblies. QuietSound has been proven to repeatedly perform as engineered to meet design requirements.

All QUIETSOUND products are engineered with high durability to withstand foot traffic, pouring equipment, and materials.

U.S. RUBBER RECYCLING, INC.

U.S. RUBBER Recycling, Inc., manufacturer of QuietSound Acoustical Underlayment was founded in 1986. Located in Colton, CA , U.S. RUBBER is the largest user of scrap tire rubber in California and annually recycles thousands of pounds of scrap tire rubber, helping to conserve thousands of barrels of oil to make viable solutions for the commercial, consumer, and industrial markets.

U.S. RUBBER is committed to operating its business and facilities in a manner that use resources wisely and protects the quality of the environment and the health and safety of associates, families, and the community. The company is actively affiliated with the U.S. Green Building Council, California Department of Transportation, and Materials Analytical Services.

For more information on QUIETSOUND Sound Insulation, call 1-909-825-1200
or visit www.quiet-sound.com